

**Quality Product**

All Manufactured modules are tested 100% by EL (Electroluminescence) during the Production Process & Free from micro cracks.

Our high-performance modules are highly efficient, reliable and provide optimal output.

The company manufactures solar modules in compliance with global standard including MNRE, IEC 61215, 61730-1, 61730-2, 61701, UL 1703, UL 61730, ISO 9001:2008 & ISO 14001:2004 & 18001:2007.

**High Efficiency .**

High Module efficiency is obtaining top performance even in diffused light conditions.

We are leaders in providing our customers with maximum sunlight conversion.

**Application Possibilities**

Residential and Commercial rooftops, Car ports, Solar Farming, Balconies, Awnings, Street lights, Fences, and Canopies.

**Our Team**

We have a team of qualified experts and engineers making sure that modules produce maximum power. We pride ourselves in caring for each individual customer needs with detailed attention. Our end goal is to give a highly efficient product with exceptional customer service.

**Guarantee**

Our product is durable and has 25 years performance warranty. Integrated manufacturing of cells & modules in production line guarantees optimum performance.

**US OFFICE:**

Sonali Energiees USA LLC  
 111 Charlotte Place Suite 101A  
 Englewood Cliffs, NJ 07632  
 Office Tel: 201-568-1424  
 info@sonalisolar.com



**Electric Performance Parameter**

Model	SS-M-175	SS-M-180	SS-M-185	SS-M-190	SS-M-195	SS-M-200
Nominal Maximum Power (Pmax/W)	175	180	185	190	195	200
Optimum Operating Voltage (Vmp/V)	19.98	20.05	20.11	20.15	20.21	23.56
Optimum Operating Current (Imp/A)	8.76	8.97	9.2	9.43	9.65	8.49
Open Circuit Voltage (Voc/V)	23.92	24.06	24.17	24.23	24.31	27.76
Short Circuit Current (Isc/A)	9.3	9.51	9.75	9.99	10.23	9

\* Measurement Power Tolerance on Power 0 / +%

\* Under Standard Test Conditions (STC) of irradiance of 1000W/m2

\* Maximum System Voltage: 1000v IEC/UL

\* Normal Operating cell Temperature (NOCT) of irradiance of 800W/m2, 43± 2° C

\* Spectrum AM 1.5 and cell temperature of 25 °C

**Mechanical Parameter**

Module Dimensions	1480 X 675 X 35 mm / 58.27 X 26.57 X 1.38 inch
Weight	12 kgs / 26.45lbs
Cell Size (Monocrystalline)	156x156 mm / 6.1x6.1 inch
No Of Cell	36 (4 X 9)
Junction Box	IP65 with Bypass diodes
Solar Cable	900mm (35.43 inch) length with 4mm <sup>2</sup>
Connectors	Mc4 compatible or IP67 rated
Glass (Tempered & Low Iron )	3.2mm (0.125in)
Encapsulate	EVA
Back Cover	Composite Sheet
Frame	Anodized Aluminum Alloy

**Temperature Coefficient**

Coefficient of Current	+0.035% /K
Coefficient of Voltage	-0.28% /K
Coefficient of Power	-0.38% /K


**Tested Operating Conditions**

Temperature Cycling Range	-40°C to 85°C
Humidity Freeze, Damp Heat	85% RH

**Product Warranty**

Product Warranty	12 Years
Performance Warranty	First 10 Years up to 90%,

**Module Drawing**

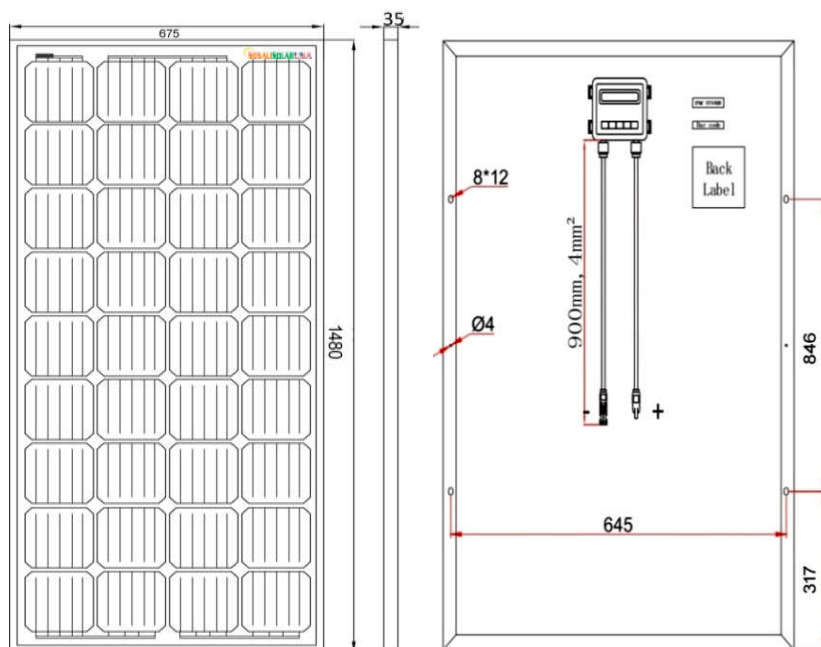

**IV Curve**

